
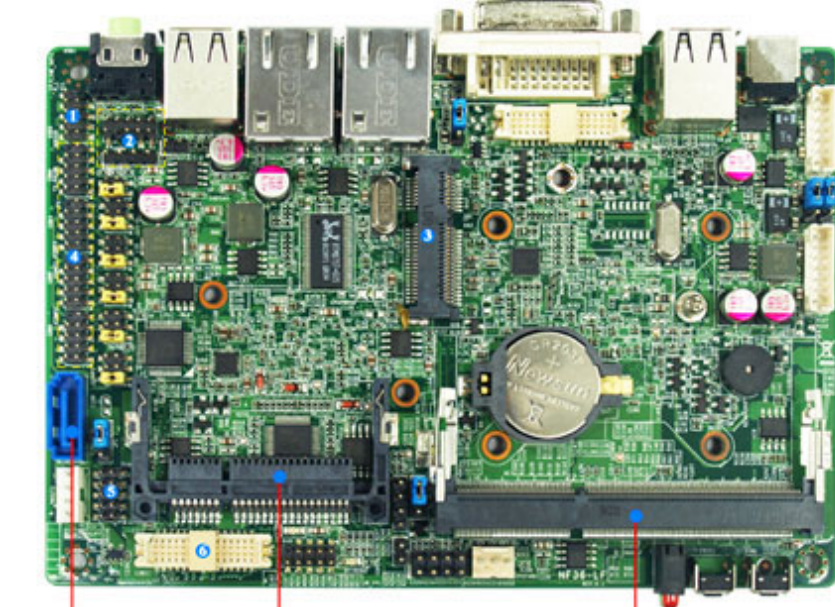


254.00 EUR
 incl. 19% VAT, plus [shipping](#)

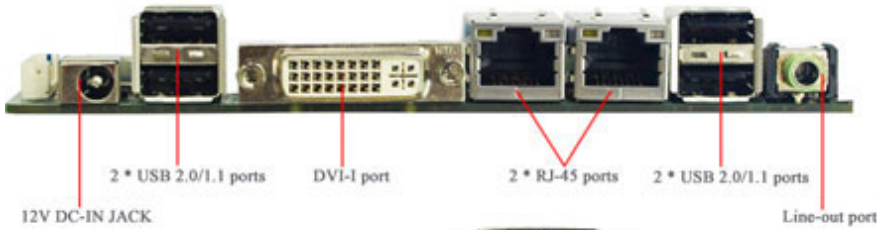

- 1 * Serial ATAIII 3Gb/s connectors
- CF card reader socket
- 1 * SODIMM Sockets for un-buffered Single Channel 64-bit DDR3
- 1 * Audio header
- 2 * USB 2.0 headers
- 1 * MINI PCI-E
- 4 * COM header(COM2-4 for RS232, COM1 for RS232/422/485)
- 24-bit dual channel LVDS connector

- INTEL® Cedar Trail-M Processor N2600 + NM10 Chipset
- Support 1 * DDR3 800MHz Single CH up to 2GB
- Support DirectX 9 Graphics up to 640MHz
- Support 1 * Serial ATAll (3Gb/s) Devices
- Support Dual Gigabit LAN
- Support DVI-I Output
- Equipped with 802.11 b/g/n WiFi card & Internal Antenna (JBC362F36W-2600-B only)
- Support 2.5" SATA HDD
- Support Mini PCI-E socket
- Support CFAST card socket
- Small size and provide VESA & Wall mount bracket (Optional)

Model No	JBC362F36-2600-B / JBC362F36W-2600-B	
Motherboard Specification		
CPU	INTEL® Cedar Trail-M Processor N2600 (1.6GHZ)	
Chipset	INTEL®NM10 Express chipset	
Memory	1 * DDR3 800MHz Single CH SO-DIMM up to 2GB	
Expansion Slots	1 * Mini PCI-E	
LAN	2 * Realtek RTL8111EVL PCI-E Gigabit Ethernet LAN	
Audio	Realtek ALC662 HD Audio CODEC with 4-Channel	
Storage	1 * Serial ATA2 3Gb/s connector 1 * CFAST card socket	
BIOS	AMI 16MB SMT Flash ROM	
Form Factor	3.5" SBC (148mm x 102mm)	
Barebone Specification		
Product size	152.6 (L)x110 (W)x34.8 (D)mm	
Specs Devices	1 x 2.5"HDD Drive Bay (Only support SATA 2.5"HDD)	
Colors	Black	
Front I/O Port	1 * Power button	
Rear I/O Port	4 * USB 2.0 ports 1 * 12V DC jack 2 * RJ-45 port(Gigabit LAN) 1 * Line-out port 1 * DVI-I port	
Power supply	+12V DC-IN Power	
Accessory	60W AC-DC Adapter x 1 Power Cord x 1 CD x 1 Manual x 1 DVI-I to CRT Converter x 1 Wall Mount Bracket x 2 (Optional) LCD VESA Mount Bracket x 1 (Optional)	
Application	Set Top Box, Thin Client, Car PC Application, Smart Mini PC, Factory Automation.	
Packing	Color Box Dimension417(W) x 137(D) x 296(H)mm Gross Weight2.6KG Net Weight2.1KG	