


179.00 EUR
incl. 19% VAT, plus [shipping](#)

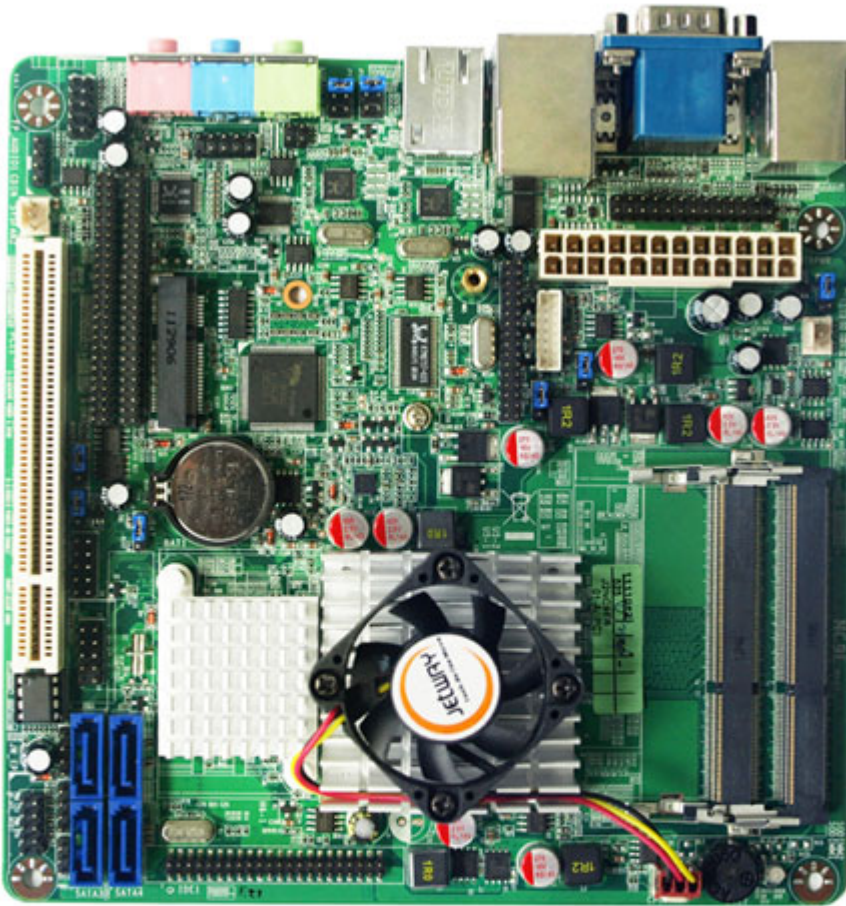

- INTEL® Pineview-D + NM10 Chipset
- Support INTEL®ATOM D525 Dual-Core (1.83GHz) CPU
- Supports 2 * Gigabit LAN
- Integrated Realtek ALC662 HD Audio Code with 6-Channel
- Support Watch dog Technology
- Compliance with ERP standard
- Mini-ITX Form Factor(170mm x 170mm)
- Support Daughter board Expansion

CPU	• INTEL ® Atom Dual-Core Processor D525 (45nm,1.80GHz,1024MB L2 Cache)
Chipset	• INTEL®Atom D525 + NM10 chipset • Build-in INTEL®GMA 3150 Graphics Core (DVMT Max. 384MB)
Memory	• 2 * DDR3 800MHz Single CH SO-DIMM up to 4GB
Expansion Slots	• 1 * PCI slot • 1 * Mini PCI-E socket
Storage	• 4 * Serial ATA2 3Gb/s connectors support RAID 0, 1, JBOD • 1 * IDE connector
Audio	• Realtek ALC662 HD Audio Code with 6-Channel
Ethernet LAN	• Realtek RTL8111EVL PCI-E Gigabit Ethernet LAN

USB	<ul style="list-style-type: none"> • Embedded 7 * USB 2.0/1.1
Special Features	<ul style="list-style-type: none"> • Support ACPI S3 • Support CPU Smart FAN & DC FAN
LVDS	<ul style="list-style-type: none"> • Onboard 18-bit Single Channel LVDS connector
Rear Panel I/O	<ul style="list-style-type: none"> • 4 * USB 2.0/1.1 ports • 1 * PS/2 KB/MS connector • 2 * RJ-45 port • 1 * Audio I/O port (Line-in, MIC and Line-out) • 1 * VGA port • 1 * COM port
Internal I/O	<ul style="list-style-type: none"> • 3 * USB 2.0 ports • CPU / Chassis Fan connectors • 1 * 24-pin ATX Power connector • 1 * COM header (COM2 for RS-232/422/485) • 1 * AUDIO_IN header • 1 * Parallel header • 1 * GPIO header
BIOS	<ul style="list-style-type: none"> • Award 8MB DIP-SPI Flash ROM
Functional	<ul style="list-style-type: none"> • ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Transportation, Financial Application
Packing	<ul style="list-style-type: none"> • Color Box Dimension ■ 200(W) x 200(D) x 70(H)mm • Cases Gross Weight ■ 15.4KGS • Cases Net Weight ■ 10.3KGS • 20 PCS / Cases, Case size : 720(L) x 410(W) x 200(H)mm
Certificate	<ul style="list-style-type: none"> • CE, FCC, RoHS
Temperature	<ul style="list-style-type: none"> • Operating within 0~60 centigrade • Storage within -20-85 centigrade
Form Factor	<ul style="list-style-type: none"> • Mini ITX Form Factor(170mmx170mm)