


289.00 EUR
incl. 19% VAT, plus [shipping](#)

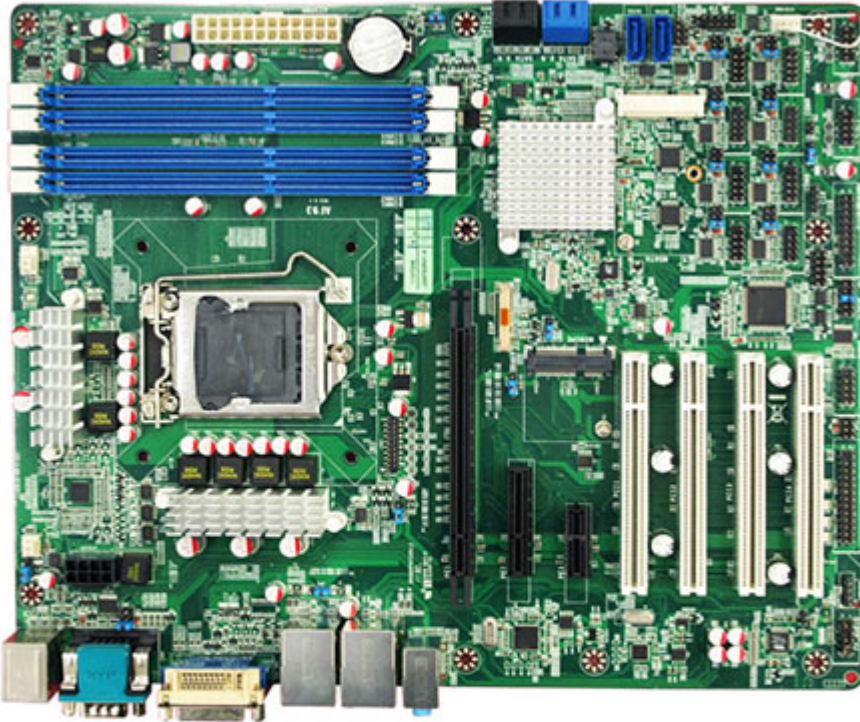

- Intel® Q77 Express Chipset
- Supports Intel LGA 1155 Socket Core™ i3, i5, i7 & Pentium Processors
- Support 4 * 240 pin 8GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 32GB
- Intel 82579LM & 82574L Gigabit LAN
- Intel Active Management Technology (iAMT 8.0)
- Support TPM 1.2 function
- Support CPU Smart FAN
- Supports ACPI S3 Function
- Support Watch dog Technology
- ATX form factor ■305mm x 244mm■

• CPU	INTEL® LGA 1155 Socket Core i7/i5/i3/Pentium Processor
• Chipset	INTEL® Q77 Chipset
• Memory	4 * 240 pin 8GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 32GB
• Expansion Slots	1 * PCIe x 16, 4 * PCI, 1 * PCIe x 1, 1 * PCIe x 4 1 * half size MINI PCI-E & 1 * full size MINI PCI-E (Selectable with mSATA) socket
• Storage	2 * Serial ATAIII 6Gb/s & 4 * Serial ATAII 3Gb/s connectors support RAID 0, 1, 5, 10 1 * mSATA socket (Selectable with full size MINI PCI-E and share with SATA6)
• Audio	Realtek ALC662 6-Channel HD Audio CODEC
• Ethernet LAN	Intel 82579LM & 82574L PCI-E Gigabit Ethernet LAN
• USB	Embedded 4 * USB 3.0 + 8 * USB 2.0/1.1
• Special Features	Support ACPI S3 Support CPU Smart FAN Support Watch Dog

Rear Panel I/O	<ul style="list-style-type: none"> 2 * USB 3.0 ports & 4 * USB 2.0/1.1 ports 2 * RJ-45 ports 1 * HDMI port 2 * COM ports 1 * VGA port 1 * DVI-D port 3 * Audio Phone Jack
Internal I/O	<ul style="list-style-type: none"> 1 * USB 3.0 header for 2 USB 3.0 ports & 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports CPU /NB / Chassis Fan connectors 1 * KB/MS headers 1 * Parallel header 1 * GPIO header 8 * COM header (COM4 for RS232/422/485) 1 * TPM 1.2 header 1 * CIR header 1 * Chassis Intrusion header 1 * AUDIO header 1 * 24-pin & 8-pin 12V ATX Power connector
BIOS	AMI EFI 64MB SMT Flash ROM
Form Factor	ATX form factor ■ 305mm x 244mm ■
Functional	ATM, Automation, Medical Equipment, Security, General Application, Gaming Machine, Transportation
Certificate	CE, FCC, RoHS
Temperature	<ul style="list-style-type: none"> Operating within 0-60 centigrade Storage within -20-85 centigrade